



Scott, S., Macquart, T., Greaves, P., Weaver, P., & Pirrera, A. (2019). *Accurate and efficient wind blade modelling using non-linear, high-order beam elements*. Abstract from Wind Energy Science Conference 2019, Cork, Ireland.

Peer reviewed version

[Link to publication record in Explore Bristol Research](#)
PDF-document

University of Bristol - Explore Bristol Research

General rights

This document is made available in accordance with publisher policies. Please cite only the published version using the reference above. Full terms of use are available:
<http://www.bristol.ac.uk/red/research-policy/pure/user-guides/ebr-terms/>

Keywords: wind turbine blade, non-linear, finite element, higher order.

Accurate and efficient wind blade modelling using non-linear, high-order beam elements

S. Scott^a, T. Macquart^a, P. Greaves^b, P.M. Weaver^a and A. Pirrera^a

Beam finite-element (FE) models have been instrumental in the predictive simulation of wind turbine blades. However, modern blades are challenging conventional design assumptions and analysis tools, due to large, non-linear deflections and the uptake of traditionally unexploited stiffness coupling coefficients. More specifically, optimised turbine designs are featuring blades with greater radii and increased compliance [1], thus deflections at ultimate loading are well within the non-linear elastic region and are incorrectly predicted by linear models [2]. In addition, such designs are exploring the benefits of aeroelastic tailoring either through geometric or material bend-twist coupling—hence accurate prediction of blade loads in response to small changes in the twist of aerofoil sections, and vice versa, is imperative.

In this work, high-order finite beam elements [3], in both a linear and co-rotational non-linear framework, are used to simulate the static test loading of an existing 7 MW wind turbine blade. The blade is an 83.5m swept blade [4], providing a good test case for predicting non-linear, coupled deflections. Additionally, a study into the convergence of high-order beam elements is presented to illustrate the benefits that they provide for modelling of modern blade structures.

This study highlights the necessity of non-linear beams in accurately predicting deflections of modern wind turbine blades, as a linear beam severely underpredicts deflections in an ultimate loading scenario (i.e. linear beam tip deflection 9% lower than non-linear for flapwise load case). Additional findings from the convergence study illustrate that high-order beam elements result in converged beam states (e.g. coupled beam deflections and modal frequencies) with far fewer nodes than conventional two-node elements. Given the large number of two-node elements required for convergence of this particular blade (Figure 1—121 nodes with 120 two-node elements vs 61 nodes with 30 three-node elements), it is clear that high-order beam elements can improve the computational efficiency of aero-elastic simulations. Furthermore, in an optimisation setting, the number of conventional two-node elements required for accurate structural modelling of large, tailored blades may even tend toward the impractical.

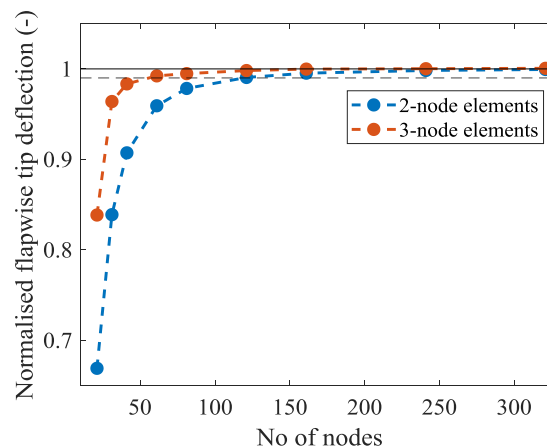


Figure 1 Convergence of flapwise tip deflection with number of two or three node beam elements. Lines indicating final/converged value (solid black) and 99% of final value (dashed black) are displayed.

[a] Bristol Composites Institute, University of Bristol, Bristol, BS8 1TR, UK

[b] Offshore Renewable Energy Catapult, Blyth, NE24 1LZ, UK

[1] Bortolotti et al., *Wind Energy*. **22**, 65 (2019)

[2] Guntur et al., *Wind Energy Science*. **2**, 443 (2017)

[3] Macquart et al., *25th AIAA Adaptive Structures Conference*. (2017)

[4] ORE Catapult, Levenmouth 7 MW Spec sheet